

General Operation


ToadWorks Redux is a Modulated Echo effect. Redux utilizes two identical, slightly offset delay signals, causing complex phase cancellations at irregular intervals. The result is a "watery" effect not unlike a chorus effect (note - Redux is NOT a chorus effect).

- 1 Delay**
The Delay knob controls the time delay in ms. Turn the knob clockwise to increase the delay time, counter-clockwise to decrease the delay time. NOTE - turning the Delay knob clockwise past noon will overlock the delay chips, causing extra noise.
- 2 Regen / Repeat**
The Regen / Repeat knob controls the speed with which the delayed signal decays. Turn the knob clockwise to increase the decay time, counter-clockwise to decrease the decay time. NOTE - turning the Regen knob clockwise past noon will overlock the delay chips, causing extra noise.
- 3 Offset**
The Offset knob controls the difference in delay time between the primary & secondary delay signals. Click the control on to add the secondary delay signal, click it off to remove the secondary delay signal. Once the control has been clicked on, turn the knob clockwise to increase the secondary delay time, counter-clockwise to decrease the secondary delay time.
- 4 Mix**
The Mix knob controls the delayed signal to clean ratio. Turn the knob clockwise to increase the delayed signal level, counter-clockwise to decrease the delayed signal level. NOTE - between 10 o'clock and 2 o'clock is the Cancellation Zone - in this range, the clean signal and delayed signals may cancel each other out at irregular intervals.
- 5 In**
The input jack is clearly labeled on the right side of the pedal. It is designed for use with 1/4" phone plugs only.
- 6 Out**
The output jack is clearly labeled on the left side of the pedal. It is designed for use with 1/4" phone plugs only.
- 7 Switch**
The switch is located directly on top of the pedal, and is used to turn the effect on and off (Note: Redux is wired for "True Bypass." This means that when the switch is in the "off" position, the original signal is routed around the effect circuit, resulting in no signal loss or coloration).
- 8 Power Supply Jack**
Redux is equipped with a 2.1mm barrel jack for use with a tip-negative 9 Volt DC REGULATED power adapter (Note: Many 9V power adapters are grossly out of spec, and the actual voltage can range anywhere from 7.5 Volts to 16 Volts. Voltages of 11V and above will affect the operation of the pedal and can damage the components. To avoid damage and/or incorrect operation, use only the highest quality power adapters). ToadWorks recommends the Godlyke Powerall 9VDC adapter.

DO NOT UNDER ANY CIRCUMSTANCES USE AN 18V OR AC ADAPTER!

Forget about "increasing headroom" - if the pedal was intended to be used with 18V, we would say so. Any voltage higher than 11 VDC will DESTROY the op-amps, and we won't fix it for free.

Due to the complex nature of the internal power regulation, if the "Offset" control is switched off when the unit is first powered on, the offset delay signal may not function - to correct this, simply click the Offset control on and re-apply the power (this can be accomplished by unplugging the Input and re-inserting the plug.)

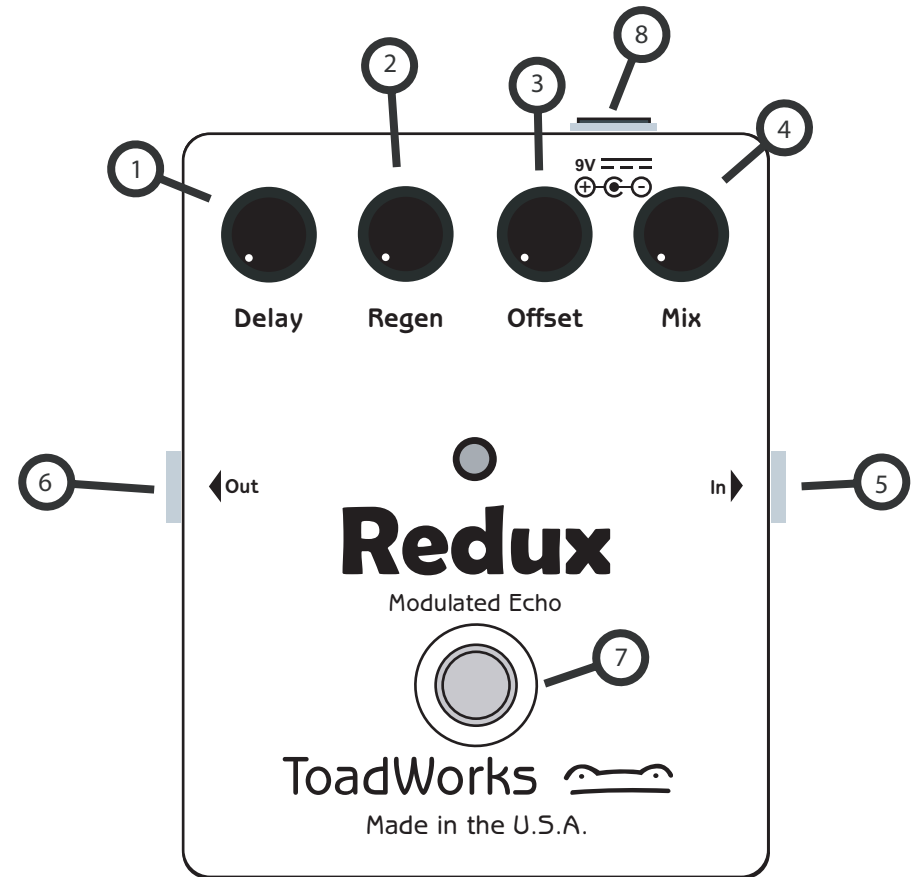

Warranty

We guarantee that your pedal will be free of defects in workmanship for a period of two (2) years from the date of purchase. However, each pedal is hand made, and as a result certain imperfections are unavoidable; color & finish will ALWAYS be slightly imperfect. Just think of it as "unique." We also guarantee the continued operation of all components for a period of two (2) years from the date of purchase. Within this two year period ToadWorks will repair or replace at our discretion any pedal that ceases to function properly as a result of faulty workmanship or materials.

This warranty can be voided by any of the following:

- Removal or replacement of any component*
- Prolonged exposure to elements*
- Abuse above and beyond normal wear and tear*
- Application of incorrect power supply*

No pedal shall be repaired or replaced that shows signs of abuse and/or modification. All requests for warranty service must be accompanied by documented proof of purchase. This warranty is non-transferable. As of January 1, 2006, units purchased from US domestic dealers and shipped to Europe, Asia and Australia are not eligible for warranty services.

ToadWorks USA

4717 N Washington St. Spokane, WA 99205 USA
Ph: (415) 462-5539 Fax: (708) 570-8303
www.ToadWorksUSA.com